

Network Video Recorder




Key Features

- 16/32-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 8 SATA HDD up to 48 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications

	BE-9816NU	BE-9832NU
Video and Audio		
IP Video Input	16-ch	32-ch
Two-way audio Input	1-ch, RCA	
Network		
Incoming bandwidth	160Mbps	200Mbps
Outgoing bandwidth	96Mbps	
Remote connection	128	
Video/Audio Output		
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	16-ch	
Decoding		
Compression	H.264	
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	4 x 4MP@20, 6 x 1080p@25, 16 x 720p@25, 32 x D1	
Hard Disk		
SATA	8 SATA interfaces	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces	
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Server, P2P	
Serial Interface	1 x RS-232, 1 x RS-485	
USB Interface	Front panel: 1 x USB2.0 Rear panel: 1 x USB2.0, 1 x USB3.0	
Alarm In	8-ch	
Alarm Out	2-ch	
General		
Power Supply	100 ~ 240 VAC	
Consumption (without HDD)	≤ 15 W	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	86 × 442 × 421mm (3.4" × 17.4" × 16.6")	
Weight (without HDD)	≤ 5.16Kg (11.38 lb)	

Dimensions

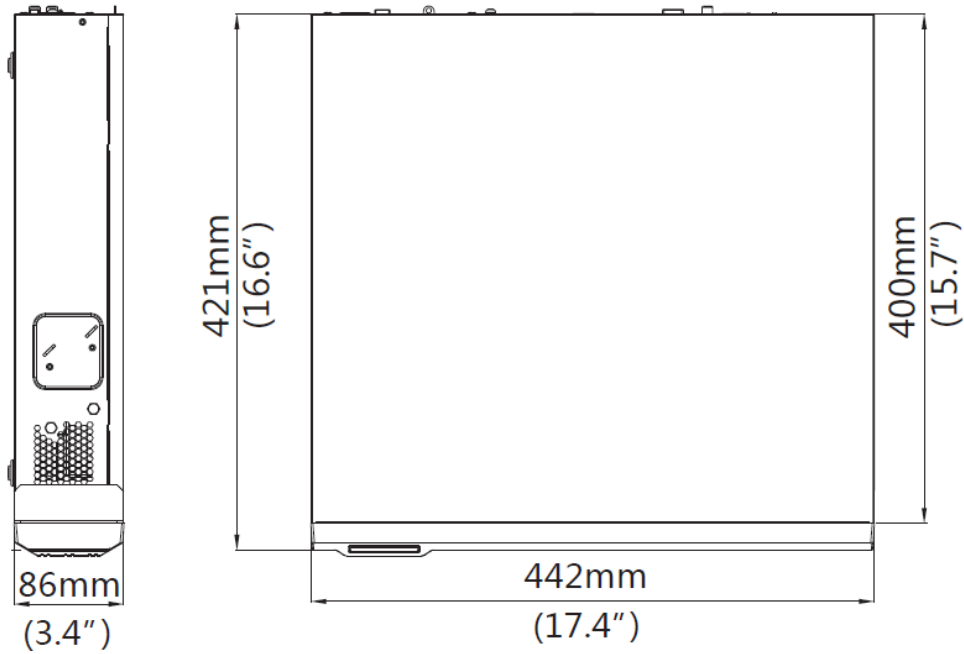

Rear Panel

