



K205 USB Joystick Keyboard

Complete Control of All the Functionality for GVD NVRs (M Series) and CMS Manager (E150 Series)



Control Multiple NVRs, CMS and Network Cameras



The 3-axis Joystick Allows Users to Pan, Tilt and Zoom on a Real-time Basis.



Various Video Pattern Layout Selections



Assign Any Camera to Any Monitor's Particular view

GVD K205

USB Joystick Keyboard



The GVD K205 is a USB joystick keyboard for GVD CMS (E150 Series), and NVRs (M Series). The 3-axis joystick allows users to pan, tilt and zoom on a real-time basis. The universal monitor, view, and IP cameras selection gives users quicker, smoother, total control of every video operation: instant playback, snapshot, tour in the control room.

Key Feature



Control PTZ Dome Network Cameras

The GVD K205 is a USB joystick keyboard, specifically designed for responsive and accurate control of all PTZ dome network cameras.



Powerful Joystick for PTZ Control

It features a three-axis, durable joystick with X/Y-axis for positioning and turning knob to zoom.



35 Function Keys

35 function keys with all the functionality help security operators control all network cameras, NVRs, and CMS Manager.



LCD Display

The LCD indicates the spot channel of cameras or NVRs, as well as providing more information about PTZ mode or NVR/CMS mode.



USB Interface

The GVD K205 USB joystick controller is equipped with a USB cable and thus very easy to install.




Compatible GVD Products


GVD CMS : E150

GVD NVRs: M6024/ M6016/ M6012, M4006, M3004, M109, M95

System Diagram

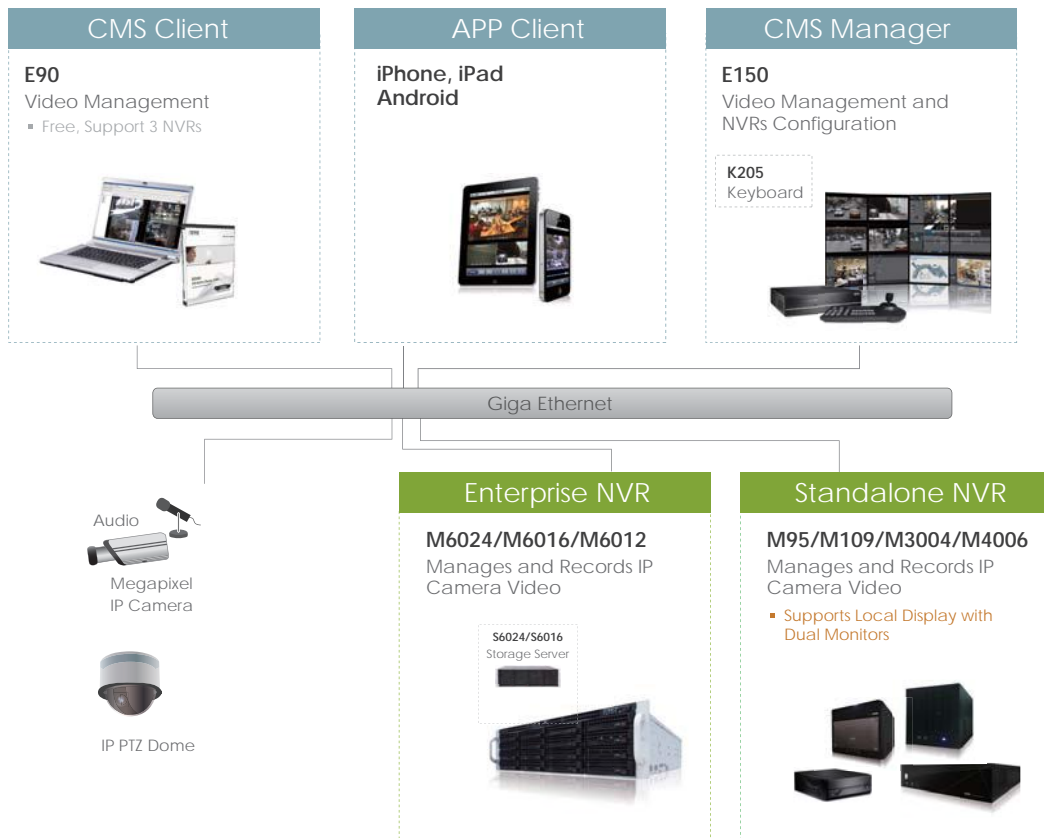

Dimensions

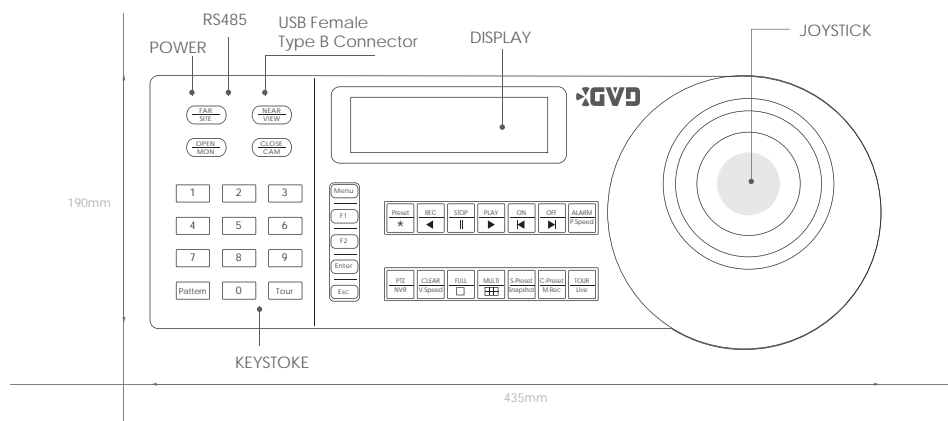

ONVIF Driving network video through global standardization

Specification

Product	K205	
Performance	Joystick Performance	3 Axis, Control PTZ(Pan/Tilt/Zoom)
	Push-buttons	35 Quick Function Buttons
Connectors	USB port	USB Female Type B Connector , Connected Directly to the Workstation/NVR
	RS485 port	RS485 Communication Link (RJ45 Jack)
Display	Display	256x64 dots, LCD
Power	Power Voltage	7~20 Vac/Vdc
	Power Consumption	70mA / 12Vdc
Environment	Operation Temperature	20°C ~ 60°C (68°F ~ 140°F)
	Operation Humidity	>=90%
Appearance	Dimensions	390(L)x145(W)x70(H)mm
	Package Size	435(L)x190(W)x175(H)mm
	Net Weight	0.75 Kg
	Gross Weight	1.4 Kg

*All specifications are subject to change without notice